
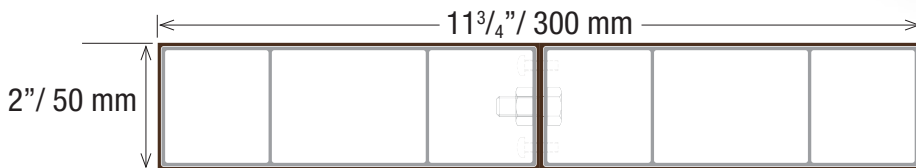


# Planeo 4048

**Geolam®**  
Architectural Eco-Technology

## Hybrid Aluminum/WPC Architectural Elements

Datasheet

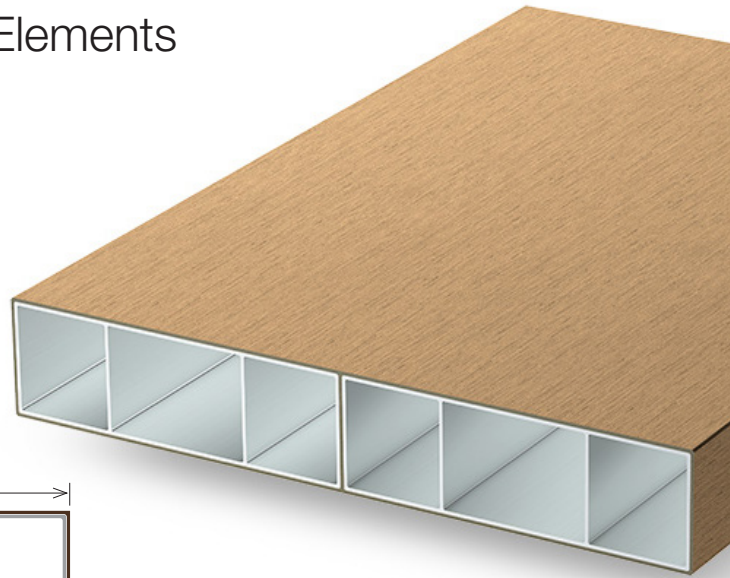

*Technical information may change without warning.  
Please ensure you that you reference our latest as shown on our website at [www.geolaminc.com](http://www.geolaminc.com)*

**Thickness:** 2 in | 50 mm  
**Width:** 11 3/4 in | 300 mm  
**Section tolerances in mm:** + 0.5 / - 2.0

**Fire rating:**  
On request before order

**Surfaces finish:** Sanded

**Profiles fastening and installation:**  
Check our website [www.geolaminc.com](http://www.geolaminc.com)

**Standard length:** 9 ft 10 in | 3.0 m

**Or order custom lengths from:**  
7 ft to 27 ft | 2.15 m to 8.25 m

**Weight:** 3.23 lb/ft | 4.80 kg/m

**Secondary moment Ix (cm<sup>4</sup>):** 50.73

**Secondary moment Iy (cm<sup>4</sup>):** 1035.09

**Section modulus Z+x (cm<sup>3</sup>):** 21.58

**Section modulus Z-x (cm<sup>3</sup>):** 21.58

**Section modulus Z+y (cm<sup>3</sup>):** 69.7

**Section modulus Z-y (cm<sup>3</sup>):** 69.7

**Core in anodized aluminum alloy:**  
A6063S-T5 Serie 6000

**Coefficient of Thermal Expansion (20-100°C):**  
23.4 µm/m/°C

**Modulus of Elasticity:** 68.9 GPa

**Max Tensile Strength:** 186 Mpa

**Carbon Footprint:**  
WPC : 1.54 kg CO<sub>2</sub> /Kg  
Profile : 9.005 kg CO<sub>2</sub> /Kg

### IMPORTANT:

Planeo boards consist of other Geolam hybrid profiles, usually Soleo, that are bolted internally to produce a larger board. The bolts are usually placed 2 – 4 ft apart depending on the profile and are inset approx 2" at the end of each board. The boards can be field cut with a small tooth saw to shorten them but only the 2" on the ends that stick out past the end bolts. Please do not cut these boards anywhere else. This may compromise the structural integrity of the board.

*Sanding finish and/or shading may vary between runs*

**Standard Colors** - Minimum 1,600 ft for all colors.



Teak



Moleskin



Rosewood



Ebony


**Non-Standard Colors** - 90 day lead time - Minimum order 5,000 ft.



Ivory




Blackwood



Bilinga

**Custom Colors Available** - Minimum order 10,000 ft.

[www.geolaminc.com](http://www.geolaminc.com)  
Toll free: 1-877-627-3530  
[info@geolaminc.com](mailto:info@geolaminc.com)

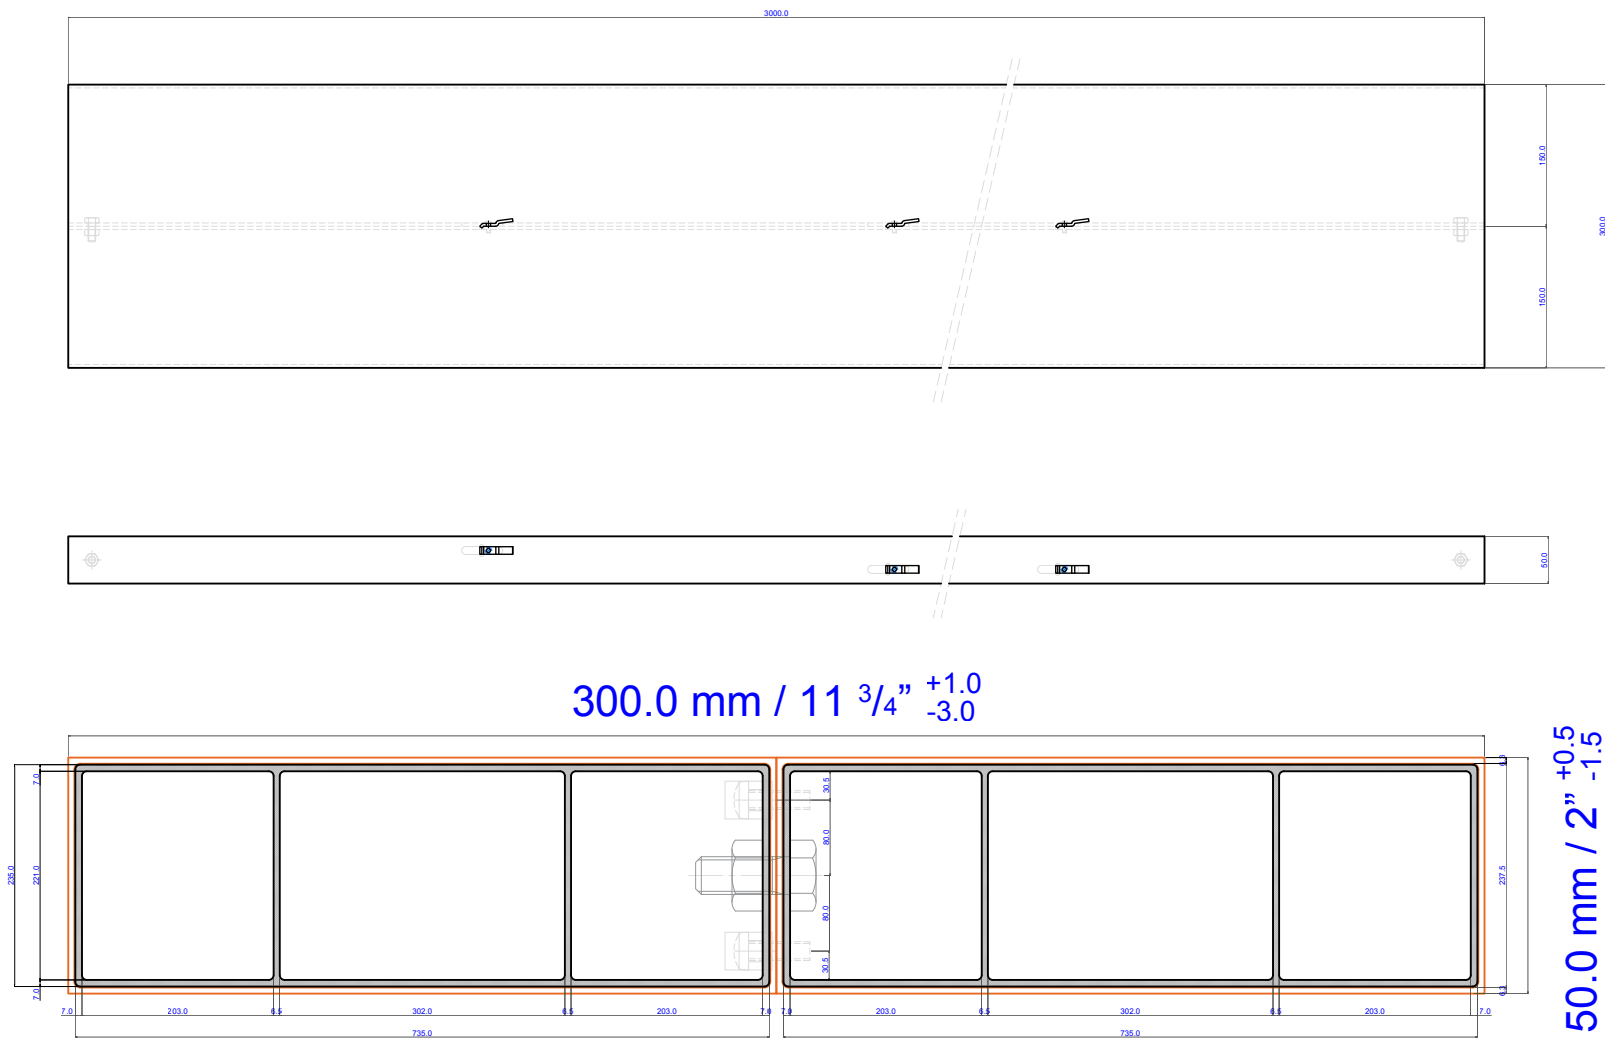

Technical specifications, dimensions in mm		Cross section coefficient Z+x (cm <sup>3</sup> )		Wood hybrid system WHS	Type 1.0
Weight (kg/ml)	4.8	Cross section coefficient Z-x (cm <sup>3</sup> )	2698.50	<h1>Planeo 4048</h1>	
Cross section, secondary moment Ix (cm <sup>4</sup> )	31707.34	Cross section coefficient Z+y (cm <sup>3</sup> )	8712.87		
Cross section, secondary moment Iy (cm <sup>4</sup> )	646931.02	Cross section coefficient Z-y (cm <sup>3</sup> )	8712.87		