
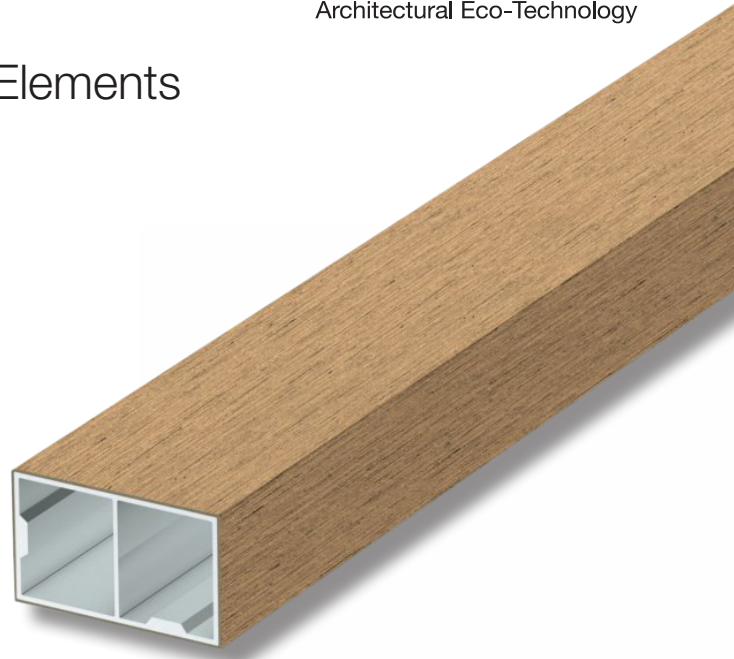


# Soleo 6008

**Geolam**<sup>®</sup>  
Architectural Eco-Technology

## Hybrid Aluminum/WPC Architectural Elements

Datasheet

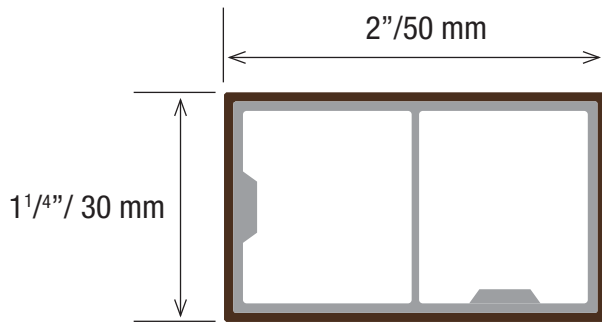

*Technical information may change without warning.  
Please ensure you that you reference our latest as shown on our website at [www.usa.geolam.com](http://www.usa.geolam.com)*

**Thickness:** 1 1/4 in | 30 mm  
**Width:** 2 in | 50 mm  
**Section tolerances in mm:** + 0.5 / - 2.0

**Fire rating:**  
On request before order

**Surfaces finish:** Sanded

**Profiles fastening and installation:**  
Check our website [www.usa.geolam.com](http://www.usa.geolam.com)

**Standard length:** 9 ft 10 in | 3.0 m

**Or order custom lengths from:**  
7 ft to 19 ft 8 in | 2.15 m to 6 m

**Weight:** 0.57 lb/ft | 0.85 kg/m

**Secondary moment I<sub>x</sub> (cm<sup>4</sup>):** 2.75

**Secondary moment I<sub>y</sub> (cm<sup>4</sup>):** 6.64

**Section modulus Z<sub>+x</sub> (cm<sup>3</sup>):** 1.81

**Section modulus Z<sub>-x</sub> (cm<sup>3</sup>):** 2.05

**Section modulus Z<sub>+y</sub> (cm<sup>3</sup>):** 2.56

**Section modulus Z<sub>-y</sub> (cm<sup>3</sup>):** 2.72

**Core in anodized aluminum alloy:**  
A6063S-T5 Serie 6000

**Coefficient of Thermal Expansion (20-100°C):**  
23.4 μm/m/°C

**Modulus of Elasticity:** 68.9 GPa

**Max Tensile Strength:** 186 Mpa

**Carbon Footprint:**  
WPC : 1.54 kg CO<sub>2</sub> /Kg  
Profile : 9.005 kg CO<sub>2</sub> /Kg

*Sanding finish and/or shading may vary between runs*

**Standard Colors** -  Teak and Rosewood stocked in the US, no minimum.  
Minimum 1,000 lineal ft. for Moleskin and Ebony.



Teak



Moleskin



Rosewood



Ebony

**Non-Standard Colors** - 90 day lead time - Minimum order 5,000 lineal ft.




Blackwood



Bilinga

**Custom Colors Available** - Minimum order 6,000 lineal ft.

[www.usa.geolam.com](http://www.usa.geolam.com)  
Toll free: 1-877-627-3530  
[info@geolaminc.com](mailto:info@geolaminc.com)

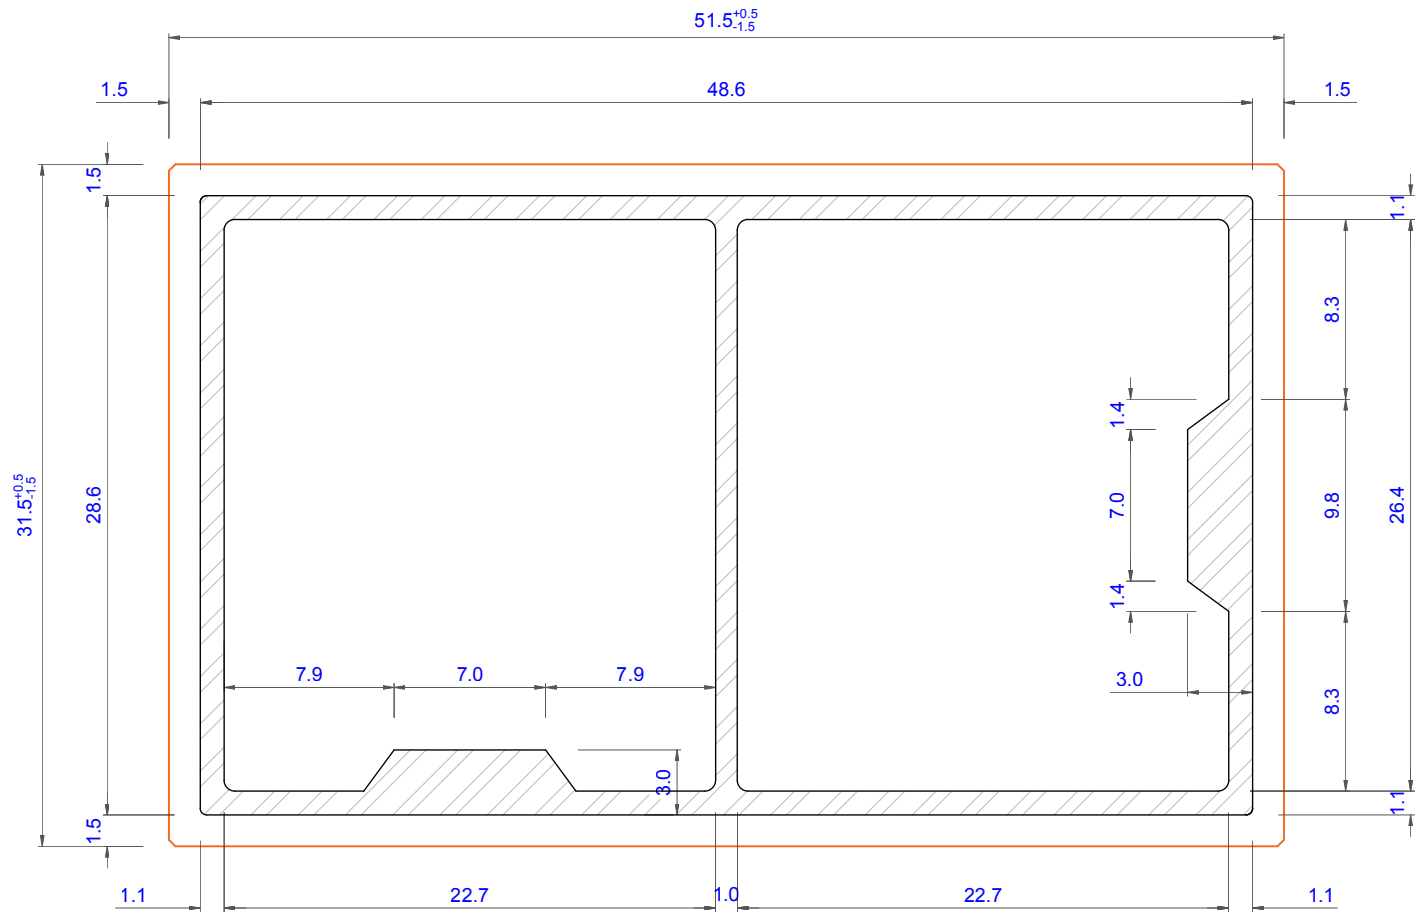

**Technical specifications, dimensions in mm**

Weight (kg/ml)	0.85
Cross section, secondary moment I <sub>x</sub> (cm <sup>4</sup> )	2.75
Cross section, secondary moment I <sub>y</sub> (cm <sup>4</sup> )	6.40

Cross section coefficient Z+x (cm<sup>3</sup>)

Cross section coefficient Z-x (cm <sup>3</sup> )	2.05
Cross section coefficient Z+y (cm <sup>3</sup> )	2.56
Cross section coefficient Z-y (cm <sup>3</sup> )	2.72

1.81

**Wood hybrid system WHS**

Type 1.0

**Soleo 6008**

**Geolam**  
usa.geolam.com